



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication: **17.01.2018 Bulletin 2018/03** (51) Int Cl.: **E04F 13/04 (2006.01) E04B 1/98 (2006.01)**

(21) Application number: **17181564.0**


(22) Date of filing: **14.07.2017**

<p>(84) Designated Contracting States: <b>AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR</b> Designated Extension States: <b>BA ME</b> Designated Validation States: <b>MA MD</b></p>	<p>(71) Applicant: <b>Fiorin, Walter</b> <b>31022 Preganziol (IT)</b></p> <p>(72) Inventor: <b>Fiorin, Walter</b> <b>31022 Preganziol (IT)</b></p> <p>(74) Representative: <b>Zamprogno, Bruno et al</b> <b>STUDIO TORTA S.p.A.</b> <b>Via Viotti, 9</b> <b>10121 Torino (IT)</b></p>
<p>(30) Priority: <b>15.07.2016 IT 201600074430</b></p>	

(54) **ELASTIC ANCHORING OF PLASTER LAYERS**

(57) Anchoring elastic system (1) to strengthen the anchorage of a plaster layer (300) to a plaster-holding structure (200). The system (1) comprises a plurality of springs (3) (5), each of which is formed by a first portion (3a) (5a) and a second portion (3b) (5b), which extends projecting from said first portion (3a) (5a) along a longitudinal axis (A); a plurality of holes (4), which are formed at least partially on said top surface (300a) of the plaster layer (300) and extend along axes approximately parallel

and spaced apart from one another; and wherein the second portion (3b) (5b) of each said spring (3) (5) is fitted in a respective hole (4) so that the respective first portion (3a) (5a) is arranged with its own base resting on the top surface (200b) of the support structure (200); the second portion (3b) (5b) of the spring (3) (5) is rigidly integral with the inner wall of the hole (4) by way of a fixing means (M) arranged in the hole 4 itself.

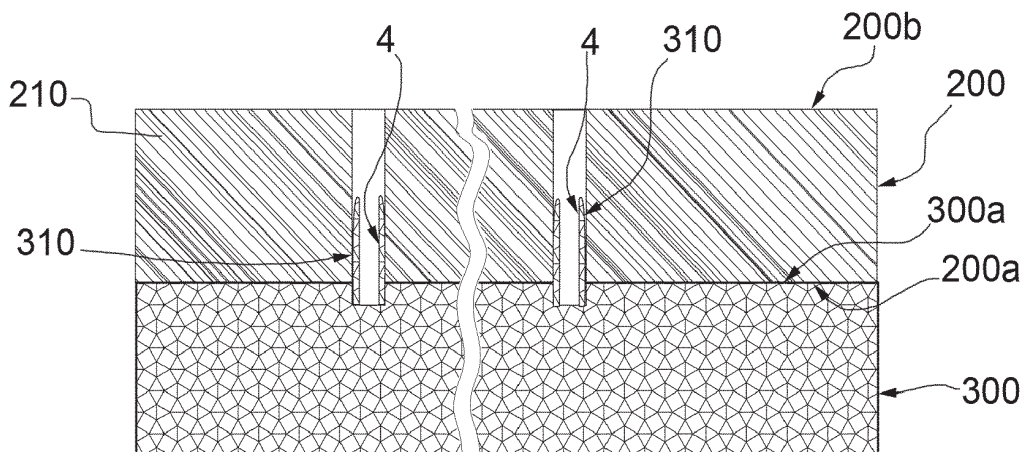

**FIG. 2**